
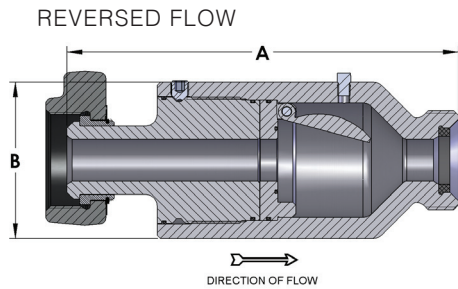





Flapper Style

- Cylindrical Shape
- Compact
- Easy Flow Identification
- Easy Maintenance
- Flapper seat “O” Ring seals not exposed to flow
- Eye Hook for easy handling (Optional)
- Hydrostatic Pressure Test report supplied with each valve

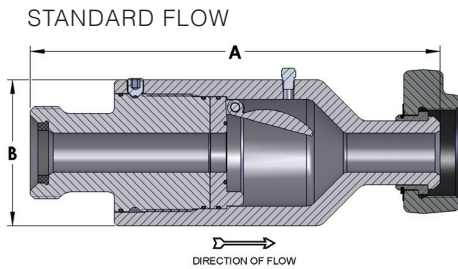

Dart Style

- Cylindrical Shape
- Compact
- Easy Flow Identification
- Easy Maintenance
- Long life steel dart
- Eye Hook for easy handling (Optional)
- Hydrostatic Pressure Test report supplied with each valve

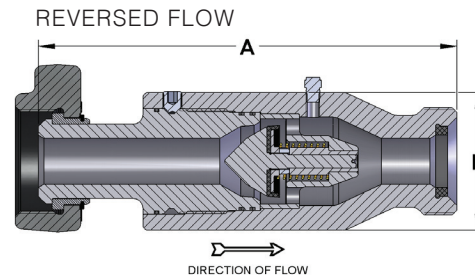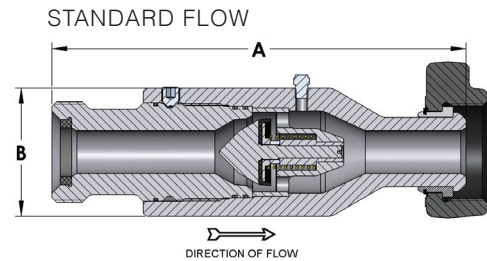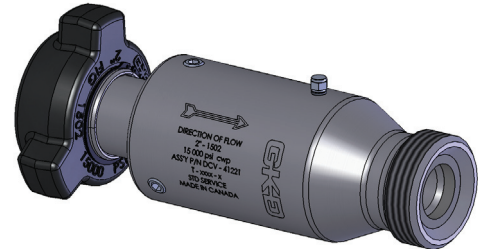

SIZE	Flapper Style		
	Dimension – inch (mm)		WEIGHT lbs (kg)
	A	B	
1" Standard	14-1/4 (362)	4-1/8 (104.8)	35 (15.9)
1" Reversed	14-1/4 (362)	4-1/8 (104.8)	36 (16.3)
1-1/2" Standard	14-1/16 (357.2)	4-1/8 (104.8)	44 (20)
1-1/2" Reversed	12 (304.8)	4-1/8 (104.8)	40 (18.1)
2" Standard	18-1/4 (463.5)	6-1/2 (165.1)	98 (44.5)
2" Reversed	16-1/4 (412.8)	6-1/2 (165.1)	94 (42.6)
3" Standard	20 (508)	7-1/8 (181)	128 (58)
3" Reversed	20 (508)	7-1/8 (181)	128 (58)

SIZE	Dart Style		
	Dimension – inch (mm)		WEIGHT lbs (kg)
	A	B	
1" Standard	14-7/8 (377.8)	4-1/8 (104.8)	37 (16.8)
1" Reversed	13-1/4 (336.6)	4-1/8 (104.8)	35 (15.9)
1-1/2" Standard	16-7/8 (428.6)	5-1/4 (133.4)	67 (30.4)
1-1/2" Reversed	15-7/8 (403.2)	5-1/4 (133.4)	66 (29.9)
2" Standard	17 (431.8)	5-1/4 (133.4)	70 (31.8)
2" Reversed	16 (406.4)	5-1/4 (133.4)	68 (30.8)
3" Standard	N/A	N/A	N/A
3" Reversed	N/A	N/A	N/A

Availability: Service – Standard, H2S or CO₂; Figure 602, 1002 and 5002 Connections

